


MilDot 3

RD illuminated.

Illuminated reticle for estimating range, hold-over and windage at long ranges.

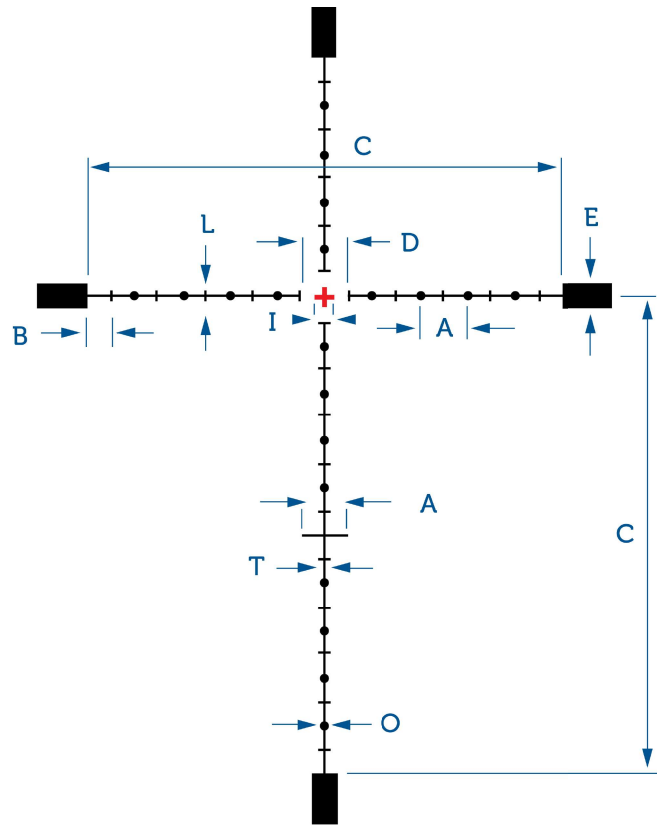

MeoPro Optika6 5-30x56 RD FFP

MeoTac 3-12x50 RD

	Dimensions				
	cm/100m	in/100yd	MOA	mRad	Power
A	10,0	3,60	3,44	1,00	
B	5,0	1,80	1,72	0,50	
C	100,0	36,00	34,38	10,00	
D	10,0	3,60	3,44	1,00	
E	5,0	1,80	1,72	0,50	
I	4,0	1,44	1,38	0,40	
L	2,5	0,90	0,86	0,25	
O	2,0	0,72	0,69	0,20	
T	0,5	0,18	0,17	0,05	